


# MB522 PCB Terminal Block, Single Mold



MB


## DIMENSIONS/POSITIONS

## MB522-381A

間距	Pitch	3.81mm
位數	Poles	6 ~ 48Poles
塑膠本體	Housing Material	PA 66
壓線圈	Cage Clamp	Brass, Ni Plated
端子	Contact	Brass, Tin Plated
螺紋	Screw Thread	M2.0, Steel, Zinc Plated
電線線徑	Wire Size	16 ~ 26AWG
剝線長度	Wire Strip Length	4.5mm ~ 5.5mm
PCB孔徑	PCB Hole Diameter	1.3mm
最大緊固扭矩	Tightening Torque, Max.	2.0 Lb-in
環境作業溫度	Operating Temperature	-40°C to +105°C

## TECHNICAL DATA

連接符合標準	Connection in acc. with standard EN-VDE	
額定電流 I <sub>n</sub>	Nominal Current I <sub>n</sub>	10A
額定橫截面	Nominal Cross Section	1.5mm <sup>2</sup>
最大負載電流	Maximum load current	10A
絕緣材料	Insulating Material	PA
阻燃等級,符合UL94	Inflammability class acc. to UL94	V0
額定電壓,UL/CUL	Nominal voltage, UL/CUL	300V
額定電流,UL/CUL	Nominal current, UL/CUL	10A

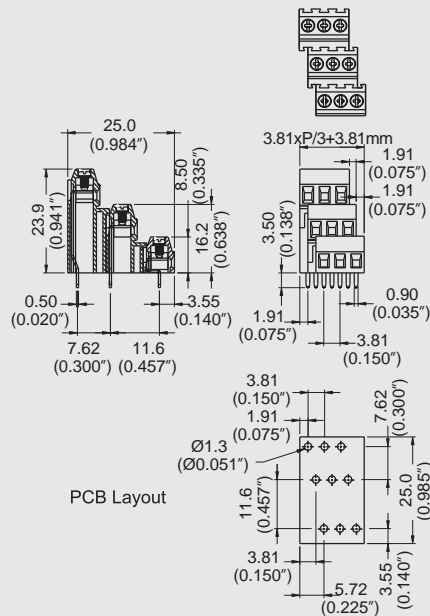

Note:  
Screw Plating:Changes are available upon request